



THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER ORIGINAL (1)

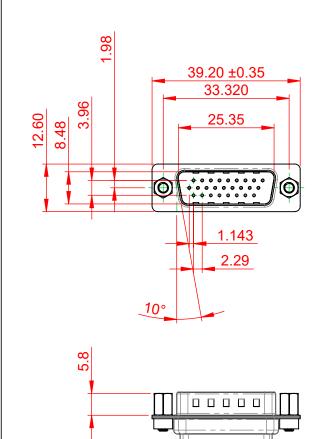

6.1 ±0.35 0.9



NOTES:

MATERIAL:

HOUSING: THERMOPLASTIC POLYESTER, UL94V-0 SHELL: STEEL, NICKEL PLATED CONTACT: COPPER ALLOY, GOLD FLASH PLATED

OPERATING TEMPERATURE: -55°C ~ 85°C

CURRENT RATING: 3A PER CONTACT CONTACT RESISTANCE: 25mQ MAX. INSULATOR RESISTANCE: 5000MΩ min. DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC rms

	637 SERIES D-SUB CONNECTOR		SW REFERENCE NO.: 637 ASSEMBLY		
			DRAWN: C.B	DATE: AUG. 01/20	018
			CHECKED:	DATE:	
	EDAC INC TORONTO, ONTARIO CANADA YOUR CONNECTION TO QUALITY & SERVICE	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC., AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: 1:1	SHEET 1 OF	1
			DRAWING NUMBER: 637-026-	230-043	ISSUE
			PART NUMBER: 637-026-	230-043	1



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

SW REFERENCE NO.: 637 ASSEMBLY						
DRAWN: C.B	DATE: AUG. 01/2018					
CHECKED:	DATE:					
SCALE: 1:1	SHEET 1 OF 1					
DRAWING NUMBER: 637-026-2	230-043 ISSUE					
PART NUMBER: 637-026-2	230-043 1					