




THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER

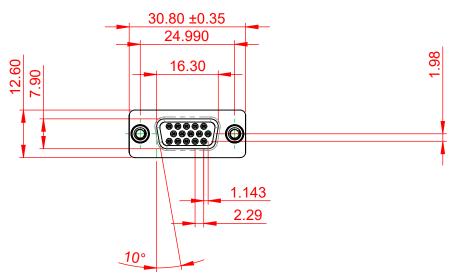





## NOTES:

MATERIAL:

HOUSING: THERMOPLASTIC POLYESTER, UL94V-0 SHELL: STEEL, NICKEL PLATED CONTACT: COPPER ALLOY, GOLD FLASH PLATED

OPERATING TEMPERATURE: -55°C ~ 125°C

CURRENT RATING: 3A PER CONTACT CONTACT RESISTANCE: 25mΩ MAX. INSULATOR RESISTANCE: 5000MΩ min. DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC rms

|  | 638 SERIES D-SUB CONNECTOR   |  | SW REFERENCE NO.: 628 ASSEMBLY |                 |       |
|--|--|--|--------------------------------|-----------------|-------|
|  |  |  | DRAWN: C.B                     | DATE: AUG. 01/2 | 018   |
|  |  |  | CHECKED:                       | DATE:           |       |
|  | EDAC INC<br>TORONTO, ONTARIO<br>CANADA<br>YOUR CONNECTION TO QUALITY & SERVICE | THESE DRAWINGS AND SPECIFICATIONS<br>ARE THE PROPERTY OF EDAC INC.,AND<br>SHALL NOT BE REPRODUCED,OR COPIED<br>OR USED AS THE BASIS FOR THE<br>MANUFACTURE OR SALE OF APPARATUS<br>WITHOUT WRITTEN PERMISSION. | SCALE: 1:1                     | SHEET 1 OF      | 1     |
|  |  |  | DRAWING NUMBER: 638-0          | 15-231-078      | ISSUE |
|  |  |  | PART NUMBER: 638-0             | 15-231-078      | 1     |



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.