






TOLERANCE UNLESS OTHERWISE SPECIFIED		THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.
.X	±0.25	
.XX	±0.15	
.XXX	±0.05	


.XXXX ±0.02




 \emptyset 0.55 (19x)

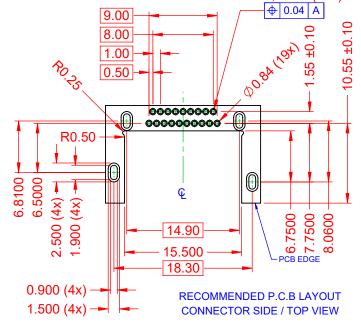







NOTE: **ELECTRICAL SPECIFICATIONS:**

CURRENT RATING: 0.5A 40V AC **VOLTAGE RATING: CONTACT RESISTANCE:** $30m\Omega$ MAX.

DIELECTRIC WITHSTANDING

VOLTAGE:

500V AC/ 1 MINUTE

INSULATOR RESISTANCE:

A) UNMATED:

100MΩ min. @ 500 VDC

PART NUMBER:

B) MATED: 10M min. @ 150 VDC

OPERATING TEMPERATURE: -20°C~85°C STORAGE TEMPERATURE: -20°C~65°C

MATERIAL & FINISH:

SHELL: COPPER ALLOY, NICKEL PLATED **HOUSING:** LCP, BLACK IN COLOUR, UL94V-0 CONTACTS: COPPER ALLOY, 30µ" GOLD PLATED

HDMI TYPE A RECEPTACLE - MID-MOUNT



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.



EDAC INC TORONTO, ONTARIO CANADA

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC..AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

ACAD REFERENCE NO.: 694C519-X53-011				
DRAWN: C.B	DATE: January 5, 2021			
CHECKED:	DATE:			
SCALE: 2:1	SHEET 1 OF 1			
DRAWING NUMBER: 694C519-	X53-011 ISSUE			

694C519-653-011