




THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.





ISSUE NUMBER ORIGINAL




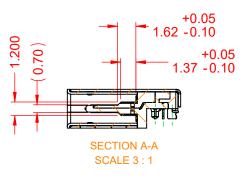












ELECTRICAL SPECIFICATIONS:

CURRENT RATING: 5A

CONTACT RESISTANCE: $40m\Omega$ MAX. **INSULATOR RESISTANCE:** $100M\Omega$ min. DIELECTRIC WITHSTANDING VOLTAGE: 100V AC **OPERATING TEMPERATURE:** -40°C ~ 80°C

MATERIAL & FINISH:

PART NUMBER:

SHELL: STAINLESS STEEL, NICKEL PLATED **HOUSING:** LCP, BLACK IN COLOUR, UL94V-0

CONTACTS: COPPER ALLOY, MATTE TIN PLATED TAILS,

30μ" GOLD PLATED ON CONTACT AREA

0 0 \$0.60 (2x) · 0.250 (12x) 0.50 5.50 **- 7.45 -**

690 SERIES RECEPTACLES USB TYPE-C 24 PIN OPTION

YOUR CONNECTION TO QUALITY & SERVICE

EDAC INC TORONTO, ONTARIO CANADA

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC..AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

ACAD REFERENCE NO.: 698C124-X15-211		
DRAWN: C.B	DATE: December 23, 2020	
CHECKED:	DATE:	
SCALE: 3:1	SHEET 1 OF 2	
DRAWING NUMBER: 698C124-X15-211		

698C124-615-211


THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

COMPLIANT

TOLERANCE UNLESS OTHERWISE SPECIFIED .X ±0.25 .XX ±0.13 .XXX ±0.05 THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER ORIGINAL

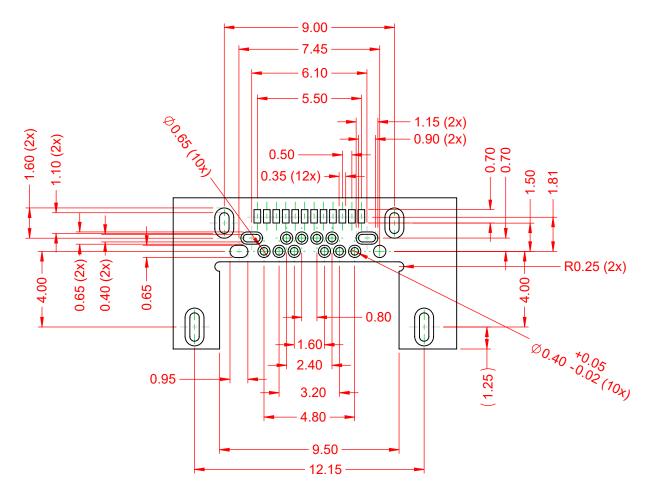

RECOMMEND P.C.B LAYOUT (COMPONENT SIDE) TOLERANCE: ±0.05

690 SERIES RECEPTACLES USB TYPE-C 24 PIN OPTION

YOUR CONNECTION TO QUALITY & SERVICE

EDAC INC TORONTO, ONTARIO CANADA

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC..AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

ACAD REFERENCE NO.: 698C124-X15-211			
DRAWN: C.B	DATE: December 23, 2020		
CHECKED:	DATE:		
SCALE: 5:1	SHEET 2 OF 2		
DRAMINO NUMBER COOCASA	V4F 044		

DRAWING NUMBER: 698C124-X15-211 ISSUE PART NUMBER: 698C124-615-211

COMPLIANT