

YOUR CONNECTION TO QUALITY & SERVICE

MANUFACTURE OR SALE OF APPARATUS

WITHOUT WRITTEN PERMISSION.


PART NUMBER:

2011/65/EU FOR RoHS COMPLIANCY.

COMPLIANT

1

J96028862P31121

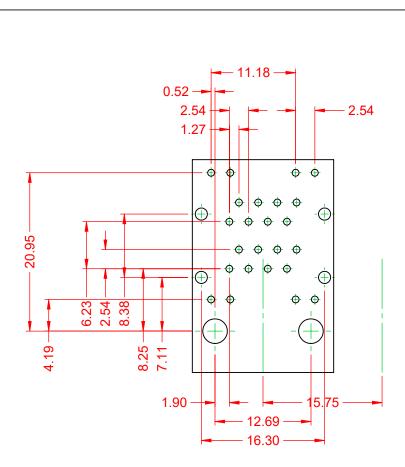

NOTES:

1. MATERIALS: **INSULATOR:** CONTACT:

2. VOLTAGE RATING:

3. CURRENT RATING:

4. CONTACT RESISTANCE:

PBT, BLACK, UL 94V-0 PHOSPHOR BRONZE, SELECT 30µ" GOLD PLATING ON CONTACT AREA TIN ON TAILS OVER NICKEL 125 VAC RMS 1.5 AMPS @25°C $20m\Omega MAX$

5. DIELECTRIC WITHSTANDING: 1000V AC CONTACT TO CONTACT OR 1500VDC CONTACT TO SCREEN AND TEST PANEL @0.5mA 50Hz OR 60Hz 60s 6. DURABILITY: 750 CYCLES MIN 7. MATING/UNMATING FORCE: 30N/3.06KG MAX 8. RETENTION STRENGTH: 30N MIN FOR 60s ±5s 9. OPERATING TEMP: -40°C TO +85°C 10 STORAGE TEMP -40°C TO +85°C RELATIVE HUMIDITY <80%

LUG CONFORMING TO FCC PART 68, SUBPART F.

	ACAD REFERENCE NO.: J96 Assembly			
RJ45, 2 PORTS, RIGHT AN	DRAWN: C.B	DATE: January 20	, 2020	
	CHECKED:	DATE:		
EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INCAND	SCALE: 2:1	SHEET 2 OF	2
TORONTO, ONTARIO CANADA	SHALL NOT BE REPRODUCED OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: J96 Assembly		ISSUE
YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: J9602886	62P31121	1



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

			ACAD REFEREN	
RJ45, 2 PORTS, RIGHT ANGLE PCB MOUNT				C.B
			CHECKED:	
	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC., AND	SCALE:	2:1

	10. STORAGE TEMP:
	MATES WITH MODULAR PL
6, RIGHT AI	NGLE PCB MOUNT



ORIGINAL

(1)



THIS IS A C.A.D. GENERATED DRAWING

DO NOT MAKE MANUAL REVISIONS TO MASTER.