

YOUR CONNECTION TO QUALITY & SERVICE

MANUFACTURE OR SALE OF APPARATUS


WITHOUT WRITTEN PERMISSION.

PART NUMBER:

2011/65/EU FOR RoHS COMPLIANCY.

COMPLIANT

J96 Assembly 1 J96028862P31221

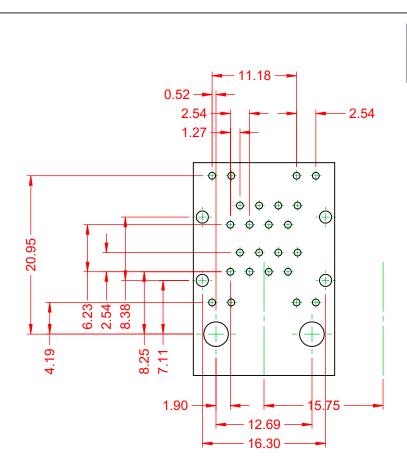

NOTES:

## 1. MATERIALS: INSULATOR: CONTACT:

2. VOLTAGE RATING:

3. CURRENT RATING:

4. CONTACT RESISTANCE:

PBT, BLACK, UL 94V-0 PHOSPHOR BRONZE, SELECT 30μ" GOLD PLATING ON CONTACT AREA TIN ON TAILS OVER NICKEL 125 VAC RMS 1.5 AMPS @25°C 20mΩ MAX 5. DIELECTRIC WITHSTANDING: 1000V AC CONTACT TO CONTACT OR 1500VDC CONTACT TO SCREEN AND TEST PANEL @0.5mA 50Hz OR 60Hz 60s
6. DURABILITY: 750 CYCLES MIN
7. MATING/UNMATING FORCE: 30N/3.06KG MAX
8. RETENTION STRENGTH: 30N MIN FOR 60s ±5s
9. OPERATING TEMP: -40°C TO +85°C
10. STORAGE TEMP: -40°C TO +85°C RELATIVE HUMIDITY <80%</li>

## MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

			ACAD REFERENCE NO.: J96 Assembly		
	RJ45, 2 PORTS, RIGHT AN	DRAWN: C.B	DATE: January 20	, 2020	
			CHECKED:	DATE:	
	EDAC INC TORONTO, ONTARIO CANADA YOUR CONNECTION TO QUALITY & SERVICE	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: 2:1	SHEET 2 OF	2
			DRAWING NUMBER: J96 Assembly		ISSUE
			PART NUMBER: J9602886	62P31221	1

THIS IS A C.A.D. GENERATED DRAWING

DO NOT MAKE MANUAL REVISIONS TO MASTER.

TOLERANCE UNLESS OTHERWISE SPECIFIED

> .X ±0.25 .XX ±0.13

.XXX ±0.05



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

	MATES WITH MOI

ISSUE NUMBER

(1)

