


RJ45, 4 PORTS, RIGHT ANGLE PCB MOUNT		ACAD REFERENCE NO.: J96 Assembly			
		DRAWN: C.B	DATE: January 20	, 2020	
		CHECKED:	DATE:		
EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: 2:1	SHEET 1 OF	2	
TORONTO, ONTARIO CANADA	HALL NOT BE REPRODUCED, OR COPIED IR USED AS THE BASIS FOR THE	DRAWING NUMBER: J96 Assembly		ISSUE	
YOUR CONNECTION TO QUALITY & SERVICE	MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	PART NUMBER: J960488	62P55121	1	



THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



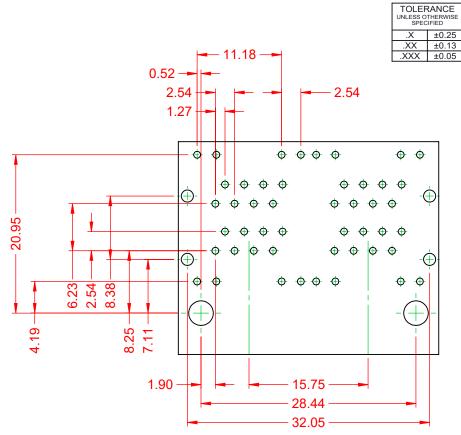

ORIGINAL

(1)

NOTES:

1. MATERIALS: **INSULATOR:**

2. VOLTAGE RATING:

CONTACT:

PBT, BLACK, UL 94V-0 PHOSPHOR BRONZE, SELECT 30µ" GOLD PLATING ON CONTACT AREA TIN ON TAILS OVER NICKEL 125 VAC RMS 1.5 AMPS @25°C

- 3. CURRENT RATING:
- 4. CONTACT RESISTANCE:

 $20m\Omega MAX$

	1500VDC CONTACT TO SCREEN AND TEST PANEL
	@0.5mA 50Hz OR 60Hz 60s
6. DURABILITY:	750 CYCLES MIN
7. MATING/UNMATING FORCE:	30N/3.06KG MAX
8. RETENTION STRENGTH:	30N MIN FOR 60s ±5s
9. OPERATING TEMP:	-40°C TO +85°C
10. STORAGE TEMP:	-40°C TO +85°C RELATIVE HUMIDITY <80%

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

5. DIELECTRIC WITHSTANDING: 1000V AC CONTACT TO CONTACT OR

		ACAD REFERENCE NO.: J96 Assembly			
	RJ45, 4 PORTS, RIGHT ANGLE PCB MOUNT		DRAWN: C.B	DATE: January 20	, 2020
			CHECKED:	DATE:	
	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: 2:1	SHEET 2 OF	2
	TORONTO, ONTARIO CANADA OR USED AS THE BASIS FOR		DRAWING NUMBER: J96 Assembly		ISSUE
	YOUR CONNECTION TO QUALITY & SERVICE	MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	PART NUMBER: J96048862P55121		1



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

ACAD REFERENCE NO.: J96 Assembly					
DRAWN: C.B		DATE:	Janua	ary 20	, 2020
CHECKED:		DATE:			
SCALE: 2:1		SHEET	2	OF	2
DRAWING NUMBER: J96 Assembly			ISSUE		
PART NUMBER: J96048862P55121			1		