

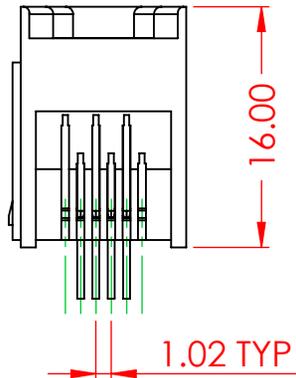
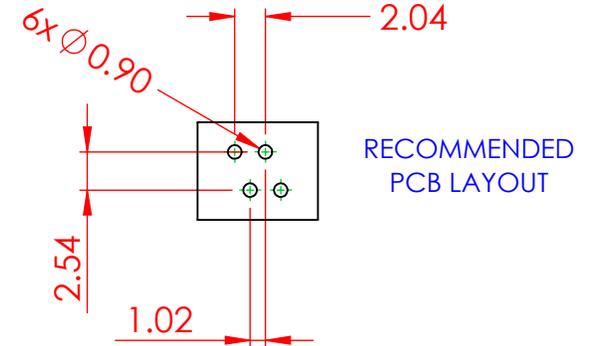


TOLERANCE UNLESS OTHERWISE SPECIFIED	
.X	±0.25
.XX	±0.13
.XXX	±0.05

THIS IS A C.A.D. GENERATED DRAWING
DO NOT MAKE MANUAL REVISIONS TO MASTER.

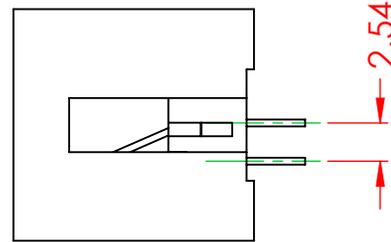

ISSUE NUMBER	
ORIGINAL	①
2.54 WAS 2.74 - CB JUL,28,2020	②

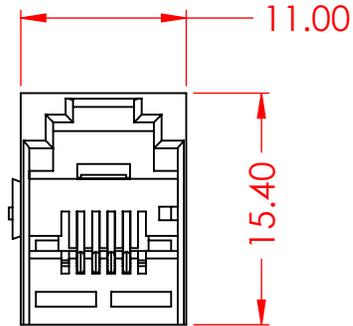

NOTES:

1. MATERIALS:
INSULATOR:
CONTACT:

PBT, BLACK, UL 94V-0
PHOSPHOR BRONZE,
30µ" GOLD PLATING

2. VOLTAGE RATING:
3. CURRENT RATING:
4. CONTACT RESISTANCE:
5. INSULATOR RESISTANCE:
5. DIELECTRIC WITHSTANDING:

125 VAC RMS
1.5 AMPS @25°C
20mΩ MAX
1000 MΩ MIN @ 500V DC
1000V AC CONTACT TO CONTACT OR
1500VDC CONTACT TO SCREEN AND TEST PANEL
@0.5mA 50Hz OR 60Hz 1 MIN

6. DURABILITY:
7. MATING/UNMATING FORCE:
8. RETENTION STRENGTH:
9. OPERATING TEMP:
10. STORAGE TEMP:
11. WAVE SOLDERING TEMP:

750 CYCLES MIN
30N/3.06KG MAX
50N MIN FOR 60 S +15 S
-40°C TO +85°C
-40°C TO +85°C RELATIVE HUMIDITY <80%
260+15°C FOR 5~10 SECONDS

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.



THIS SERIES FULLY CONFORMS TO
THE EUROPEAN UNION DIRECTIVES
2011/65/EU FOR RoHS COMPLIANCY.



YOUR CONNECTION TO QUALITY & SERVICE

EDAC INC
TORONTO, ONTARIO
CANADA

THESE DRAWINGS AND SPECIFICATIONS
ARE THE PROPERTY OF EDAC INC., AND
SHALL NOT BE REPRODUCED, OR COPIED
OR USED AS THE BASIS FOR THE
MANUFACTURE OR SALE OF APPARATUS
WITHOUT WRITTEN PERMISSION.

RJ45, VERTICAL		ACAD REFERENCE NO.: J2X Assembly	
		DRAWN: Y.Z	DATE: DEC.18/2019
		CHECKED:	DATE:
		SCALE: 2:1	SHEET 1 OF 1
DRAWING NUMBER: J2X Assembly			ISSUE
PART NUMBER: J2X016461P00030			2